




## 8-7 Evaluation of the Mass Transport Characteristics in Rock Masses

— Case Study Based on In situ and Laboratory Tests using Fractured Sedimentary Rock at the Horonobe URL —

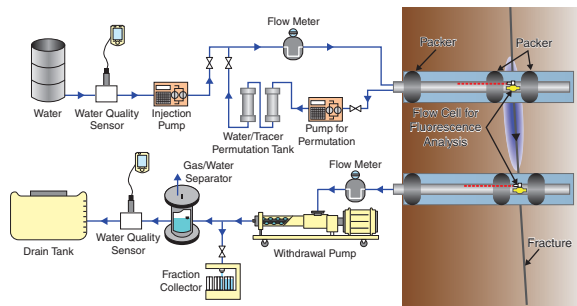


**Fig.8-17 Schematic view of the *in situ* dipole tracer migration test**

A tracer solution from the injection borehole migrates to the withdrawal borehole through the fracture. Mass-transport characteristics in the fracture are evaluated by the concentration of tracer solutions sampled from the withdrawn borehole.

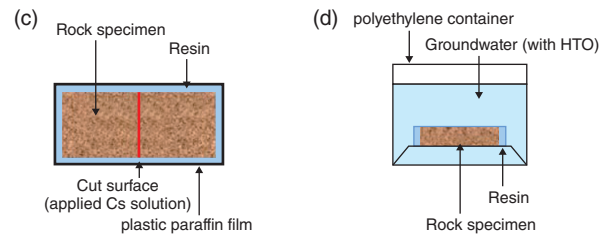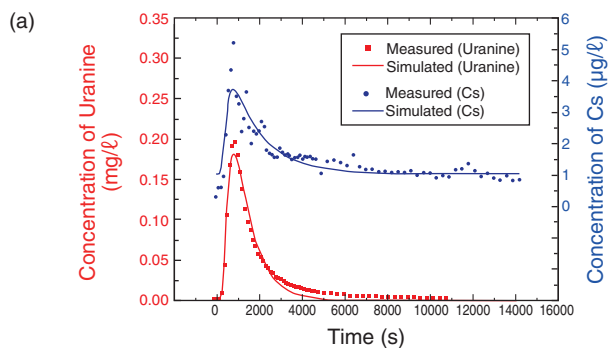

**Fig.8-19 Schematic view of non-steady diffusion tests**

(c) To determine the diffusivity obtained for Cs, a rock specimen is cut into two specimens and the Cs solution is applied to the cut surface of the specimens. (d) To determine the diffusivity obtained for HTO, a rock specimen is immersed in ground water with HTO.

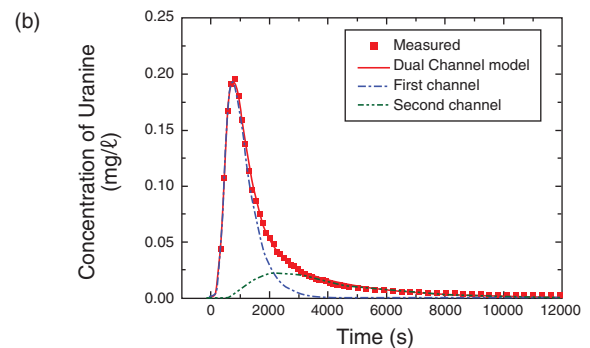

**Fig.8-18 Breakthrough curve obtained from the dipole migration tests and fitting curves**

The concentration of uranine is better described by the dual channel model (b) than by the single channel model (a). The dispersivity of Cs is greater than that of uranine, and the Wakkanaï Formation has higher sorptive properties for Cs than those for uranium because the peak concentration of Cs was much smaller than that of uranine.

Mass transport through fractures and porous media in groundwater is accompanied by dispersion, diffusion, and sorption. It is important for high-level radioactive waste disposal to develop evaluation techniques for the mass transport characteristics. *In situ* and laboratory tests were conducted to evaluate the mass transport of cesium (Cs) and uranine in the Wakkanaï Formation consisting of siliceous mudstone, which is porous and fractured rock mass.

*In situ* dipole tracer migration tests were conducted to elucidate migration processes such as sorption onto the surface of a fracture and flow channel in the fracture at the 250 m gallery of the Horonobe Underground Research Laboratory (URL). A solution using a non-radioactive tracer is injected into the injection borehole, and is then sampled from the withdrawal borehole to determine the tracer concentration to obtain the breakthrough curves (Fig.8-17). The curves shown in Fig.8-18(a) indicate that the peak concentration of Cs is much smaller than that of uranine, suggesting that the Wakkanaï Formation has high sorptive properties for Cs. The breakthrough curves also indicate that the Wakkanaï Formation

has a large dispersivity for Cs. This large dispersivity suggests that a minute amount of Cs ions sorbed onto the fracture are partially desorbed and arrived later. In addition, the result of the *in situ* dipole tracer migration test is well described by the dual-channel model (Fig.8-18(b)) compared with the single-channel model (Fig.8-18(a)), suggesting that two channels of flow exist in the fracture.

A non-steady diffusion test was conducted to elucidate the sorptive properties in the rock matrix of the Wakkanaï Formation using rock samples from the Horonobe URL (Fig.8-19). The apparent diffusivities for Cs ( $2.9 \times 10^{-12} \text{ m}^2/\text{s}$ ) and tritium (HTO) ( $3.4 \times 10^{-10} \text{ m}^2/\text{s}$ ) were obtained. The sorption coefficient for Cs (488 ml/g) was also obtained by the sorption test using powdered rock samples. It was also confirmed that the Wakkanaï Formation has high sorptive properties for Cs, as suggested by the results of the *in situ* dipole tracer migration tests. We planned to integrate the data and knowledge obtained from further combined *in situ* and laboratory tests to develop evaluation techniques for the mass transport characteristics with high reliability.

### Reference

Tanaka, S. et al., Dipole Tracer Migration and Diffusion Tests in Fractured Sedimentary Rock at Horonobe URL, Proceedings of 23rd International Conference on Nuclear Engineering (ICONE 23), Chiba, Japan, 2015, ICONE23-1860, 6p., in DVD-ROM.